


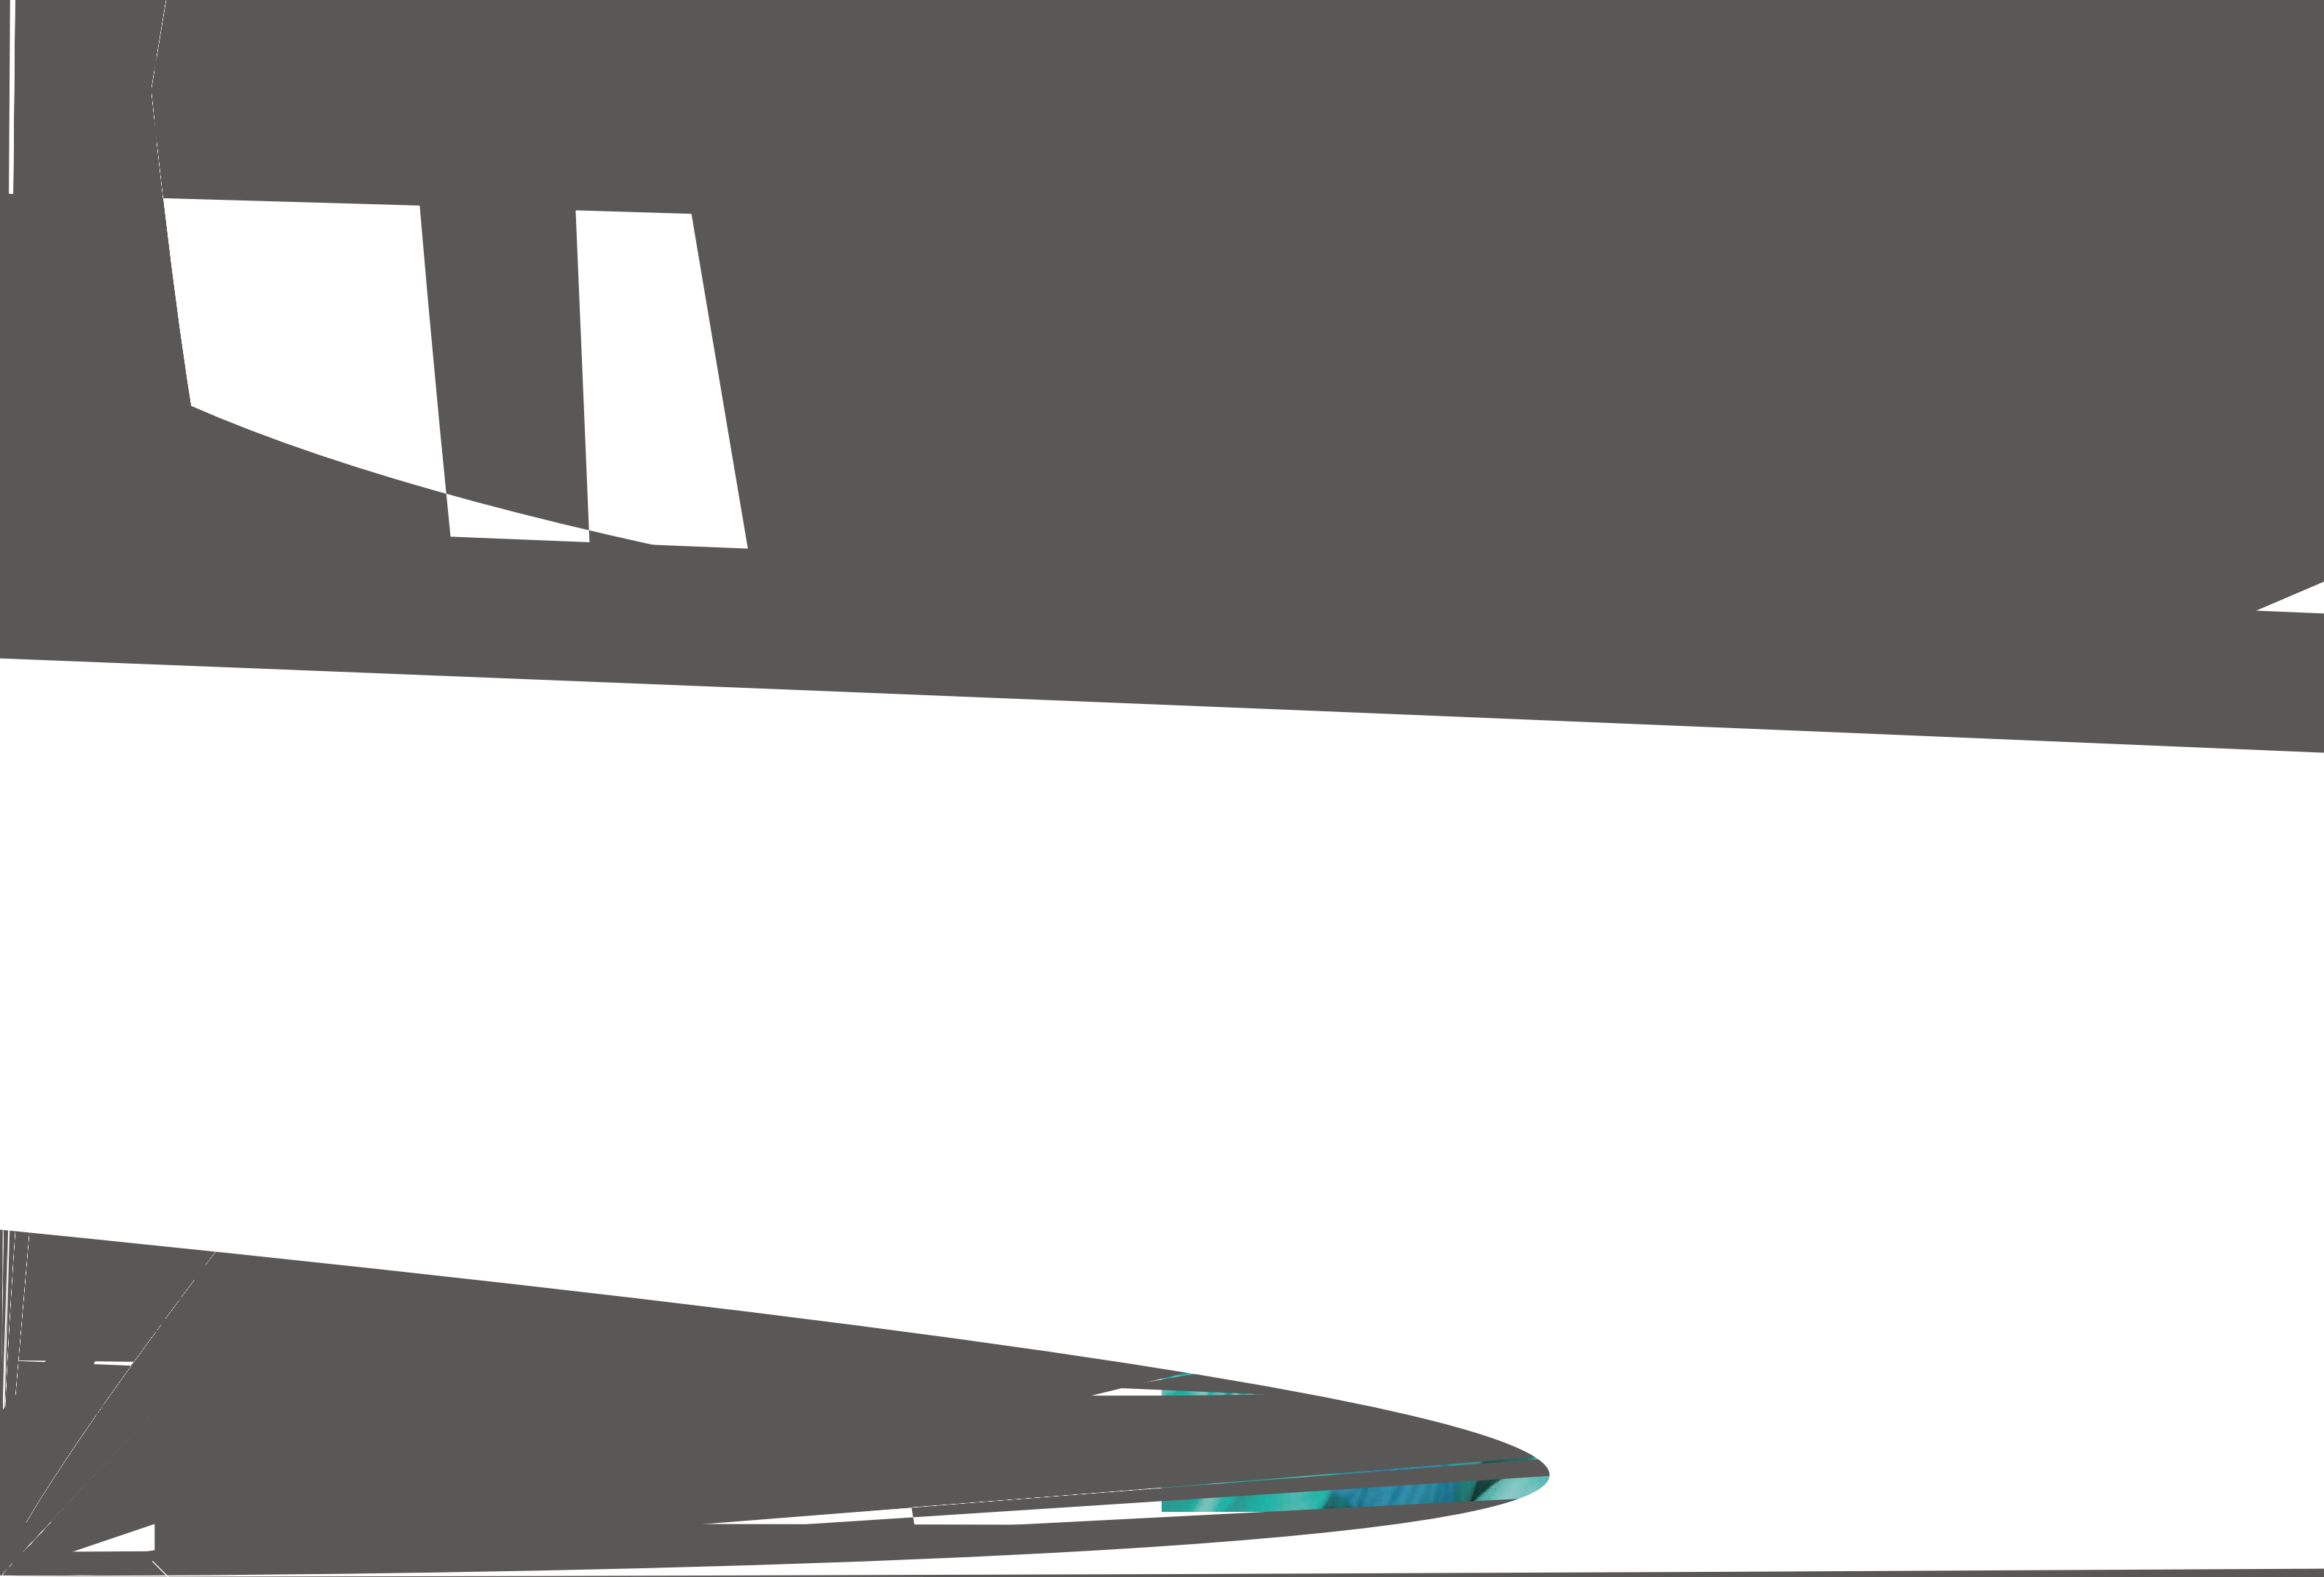

• 冗余直流电 泉

外置适配器

Extern

敬请期待



	输出电流@额定		总调整率(含设定)	峰值电流@1S
MAP80H-12	12V	6.66A	±5%	10.0A
MAP80H-15	15V	5.33A	±5%	8.0A
MAP80H-19	19V	4.21A	±5%	7.9A
MAP80H-24	24V	3.33A	±5%	7.5A

* 高峰值功率版本

	输出电流@额定		总调整率(含设定)	峰值电流@1S
MANGO80H-12	12V	6.66A	±5%	10.0A
		5.33A		8.0A
		4.21A		6.3A
		3.33A		5.0A

* 高峰值功率版本



尺寸: 4.13x2.2x1.12"



x1.33"

36V

48V

9 Class D Emissions



5.6A

80mV

5.6A

5.6A

5.41A

4.33A

3.61A

2.71A

总调整率(含设定点)

输出电压

出电流

纹波及噪声(最大值)

MP300S系列

尺寸: 5x3x1.5"

产品型号	输出电压	输出电流	纹波及噪声(最大值)	总调整率(含设定点)
MP300S-12	12V	25.0A	200mV	±2%
MP300S-15	15V	20.0A	200mV	±2%
MP300S-19	19V	15.8A	280mV	±2%
MP300S-24	24V	12.5A	280mV	±2%
MP300S-28	28V	10.8A	280mV	±2%
MP300S-36	36V	8.33A	480mV	±2%
MP300S-48	48V	6.25A	480mV	±2%

MP400系列

尺寸: 7x3.94x1.58"



MP400-12		30.0A	120mV	
MP400-15		26.6A	150mV	
MP400-18		22.2A	180mV	
MP400-20		16.67A	240mV	
MP400-24		14.2A	280mV	
MP400-30		11.1A	360mV	
MP400-40		8.33A	480mV	

Custo

3900W定制电源
尺寸: 15.68 x 8.66 x 3.31"

输出

6000W定制电源



